

2010-2-PIB-8I

Addressable Fire Panel Accessory - Peripherals Interface Board 8 Inputs

Overview


The 2010-2-PIB-8I Peripherals Interface Board is an accessory of the small to medium size intelligent addressable life safety control systems. In total there are 4 variants of this board. The 2010-2-PIB-8I is a reduced variant of the 2010-2-PIB and is perfect if your only looking for having additional supervised inputs to interface other electronic equipment on site.

Functionality

The 2010-2-PIB-8I Peripherals Interface Board provides eight inputs for compatible control panels. Inputs and outputs are supervised for short circuit and open circuit faults.

Mounting & Connections

The board can be plugged directly on the front of the main board inside the big size control panel variants on top of the new release 3 chassis. No additional wiring is required. You can use the pluggable connectors to make your connections to the field wiring. Connect an external power supply to the board directly to reduce the load of your system.

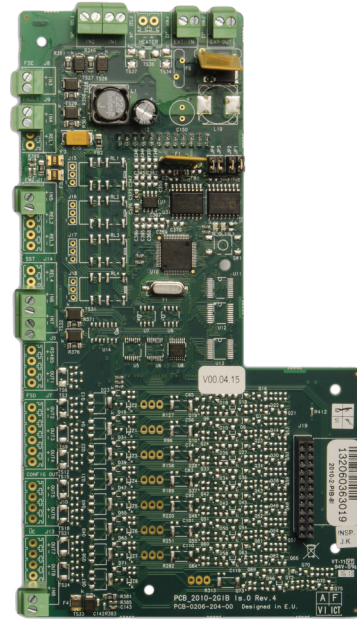

Details

- 8 supervised inputs
- Pluggable connectors

2010-2-PIB-8I

Addressable Fire Panel Accessory - Peripherals Interface Board 8 Inputs

Technical specifications

Electrical

Power supply type	VDC
Operating voltage	24 VDC

Physical

Physical dimensions	105 x 192 mm (W x H)
Net weight	105 g
Shipping weight	240 g
Mounting type	In cabinet

Environmental

Operating temperature	+5 to +40°C
Storage temperature	-20 to +50°C
Relative humidity	10 to 95% noncondensing

Standards & regulation

Certification	EN54-2, EN54-13
Standards	EN54-2 EN54-13
Environmental	CPD WEEE RoHS

Operating voltage

24 VDC

Current supply

Standby	40 mA max.
---------	------------

Input activation

Open circuit	>20.2 kOhm
Quiescent	15 kOhm
Activated	60.2 Ohm to 8 kOhm
Short circuit	<60.2 Ohm

End-of-line termination

Input (typical)	EOL 15 kOhm, 1/4 W resistor
-----------------	-----------------------------

Operating environment

Operating temperature	-5 to +40°C
Storage temperature	-20 to +50°C
Relative humidity	10 to 95% (noncondensing)

Weight

105 g

Dimensions (W x H)

105 x 192 mm

Compatibility

Release 3 hardware / firmware

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

2 May 2019 - 12:05



**United
Technologies**

Climate | Controls | Security