

Features

Basic System includes:

- Capacity for up to 998 addressable IDNet points, or up to 1000 addressable MX Loop points and up to 127 VESDA SLI points, with up to 2000 points of Annunciation and up to 20 internal and external card addresses
- Color-coded operator interface with 2 x 40 Super-twist LCD display and programmable control keys and LEDs
- CPU assembly includes dedicated compact flash memory for on-site system information storage and convenient Ethernet service port access
- 8 A power supply with up to 2 A of Auxiliary power and battery charger capacity for up to 110 Ah batteries (UL) or up to 50 Ah batteries (ULC) (33 Ah max in single bay control cabinet, 50 Ah max with 4100-0650 battery shelf in two bay control cabinet)
- 4 on-board Class A or B, 3 A NACs and one programmable auxiliary relay output rated for 2 A @ 32 VDC
- Remote annunciator module support via RUI (Remote Unit Interface) communications port, either Class B or Class A operation
- 48 LED Control Unit mount annunciation provides 40 Red and 8 Yellow pluggable LEDs (select models), optional LED kits are available for custom LED configurations
- Available with InfoAlarm Command Center expanded content user interface (two bay cabinet required)

Optional Main System Supply and door mounted modules, and other options include:

- City Connect (with or without disconnect switches)
- Alarm Relay Module
- Battery brackets for seismic area protection (see page 2)

Optional block space modules include:

- Fire Alarm Network Interface Card for 4120/4100 Peer-to-Peer network communications, supports either Class B or Class X operation
- Ethernet connectivity options include Building Network Interface Module (BNIC), SafeLINC Internet Interface, and BACpac Ethernet Portal
- Dual RS-232 Module (for printer, PC annunciator or third party interface)
- VESDA Air Aspiration High Level Interface
- Serial DACT
- 8 Zone IDC Modules Class A or B
- 4 Point Auxiliary Relay Module
- Modem or TCP/IP Physical Bridge Network Modules, Class B or Class X
- Additional IDNet and MX Loop addressable channels
- 8-point zone/relay module, each point can be an IDC input or relay output. Class A IDCs require 2 points (one out and one return). Relays rated for 2 A @ 30 VDC (resistive) and configurable as either normally open or normally closed.

* See pages 5 and 6 for additional listing information. Additional listings may be applicable; contact your local Simplex product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. are the property of Tyco Fire Protection Products.



1-Bay Cabinet



1-Bay Cabinet with LED Annunciation



2-Bay Cabinet

4010ES Control Unit Type Reference

Compatible with Simplex® remotely located:

- 4098-9757 QuickConnect2 and legacy 4098-9710 QuickConnect TrueAlarm smoke sensors
- 4003EC Small Voice Control Units
- 4009 IDNet NAC Extenders (4009A)
- 4081 Series, 110 Ah Battery Chargers
- 4100-7400 Series Graphic Annunciators
- 4190 Series PC Annunciator
- 4190 Series Fiber Modems and Physical Bridges
- 4606-9102 Remote LCD Annunciator and 4100-9400 Series Remote InfoAlarm Command Centers, and 4602 Series Status Command Units (SCU) and Remote Command Units (RCU) Annunciators
- IP communicator compatibility

4010ES Agency Listing:

- UL 864 - Control Units, System (UOJZ); Control Unit Accessories, System, Fire Alarm (UOXX); Control Units, Releasing Device Service (SYZV); Smoke Control System Equipment (UUKL)
- UL 1076 - Proprietary Alarm Units (APOU)
- UL 1730 - Smoke Detector Monitors and Accessories (UULH)
- UL 2017 - Emergency Alarm System Control Units, CO detection (FSZI); Process Equipment Management (QVAX)
- ULC-S527 - Control Units, System, Fire Alarm (UOJZC); Control Unit Accessories, System, Fire Alarm (UOXXC); Control Units, Releasing Device Service (SYZVC); Smoke Control System Equipment (UUKLC)
- ULC-S559 - Central Station Fire Alarm System Units (DAYRC)
- ULC/ORD-C1076 - Proprietary Burglar Alarm System Units (APOUC)
- ULC/ORD-C100 - Smoke Control System Equipment, UUKLC

Introduction

4010ES Series Fire Detection and Control Units provide leading edge installation, operator, and service features for customer applications in the mid-range addressable fire alarm systems market. An on-board Ethernet port provides fast external system communications to expedite installation and service activity. Dedicated compact flash memory archiving provides secure on-site system information storage of electronic job configuration files to meet NFPA 72 (*National Fire Alarm and Signaling Code*) requirements.

Modular design. A variety of functional modules are available to meet specific system requirements. Selections allow control units to be configured for either Stand-Alone or Networked fire control operation. InfoAlarm Command Center options provide convenient expanded display content (detailed on data sheet S4010-0009).

Mechanical Description

- Mounting box provides convenient stud markers for drywall thickness and nail-hole knockouts for quicker mounting
- Smooth box surfaces are provided for locally cutting conduit entrance holes exactly where required
- The hinged User Interface Control Unit easily opens for internal access
- NACs are mounted directly on power supply assemblies providing minimized wiring loss, compact size, and readily accessible terminations
- Modules are power-limited (except as noted, such as relay modules)
- Doors include tempered glass inserts, boxes and doors are available in platinum or red
- Box and door/retainer assemblies are included with basic control unit assemblies
- Cabinet assembly is rated NEMA 1 and IP 30
Cabinet assembly design has been seismic tested and is certified to IBC and CBC standards as well as to ASCE 7 categories A through F, requires battery brackets as detailed on data sheet S2081-0019

Control Unit Hardware

The Master Controller and Main System Supply are mounted in the upper section of the 4010ES cabinet. (refer to one and two bay loading reference diagrams on page 9)

4010ES Block Space Option Cards mount to the left of the 4010ES Main System Supply. In 2-bay cabinets block space option cards also mount below the 4010ES ESS.

Other 4010ES Options: The 4010ES City Connect module or the optional Alarm Relay module mount directly to the Main System Supply. These options are mutually exclusive.

Network Media modules mount directly to the 4010ES Network Interface Card.

The Battery Compartment located in the bottom of the 4010ES cabinet accepts two batteries without interfering with expansion module space.

The illustrations below identify mounting locations optional 4010ES modules.

Software Feature Summary

- TrueAlarm individual analog sensing with front Control Unit information and selection access
- Dirty TrueAlarm sensor maintenance alerts, service and status reports including “almost dirty”
- TrueAlarm magnet test indication appears as distinct test abnormal message on display when in test mode
- TrueAlarm sensor peak value performance report
- Install Mode allows grouping of multiple troubles for uninstalled modules and devices into a single trouble condition (typical with future phased expansion); with future equipment and devices grouped into a single trouble, operators can more clearly identify events from the commissioned and occupied areas
- Module level ground fault searching assists installation and service by locating and isolating modules with grounded wiring
- Recurring trouble filtering allows the control unit to recognize, process, and log recurring intermittent troubles (such as external wiring ground faults), but only sends a single outbound system trouble to avoid nuisance communications
- WALKTEST silent or audible system test performs an automatic self-resetting test cycle

Operator Interface Features


- Convenient an extensive operator information is provided using a logical, menu-driven display
- Multiple automatic and manual diagnostics for maintenance reduction
- Convenient PC programmer label editing
- Password access control
- Alarm and Trouble History Logs (up to 2000 total events) are available for viewing from the LCD, or capable of being printed to a connected printer, or downloaded to a service computer

Convenient Status Information. With the locking door closed, the glass window allows viewing of the display, status LEDs, and available operator switches.

Features include a two-line by 40-character, wide viewing angle (super-twist) LCD with status LEDs and switches as shown in the illustration below.

LED indicators describe the general category of activity being displayed with the LCD providing more detail. For the authorized user, unlocking the door provides access to the control switches and allows further inquiry by scrolling the display for additional detail.

The following illustration identifies the primary functions of the operator interface

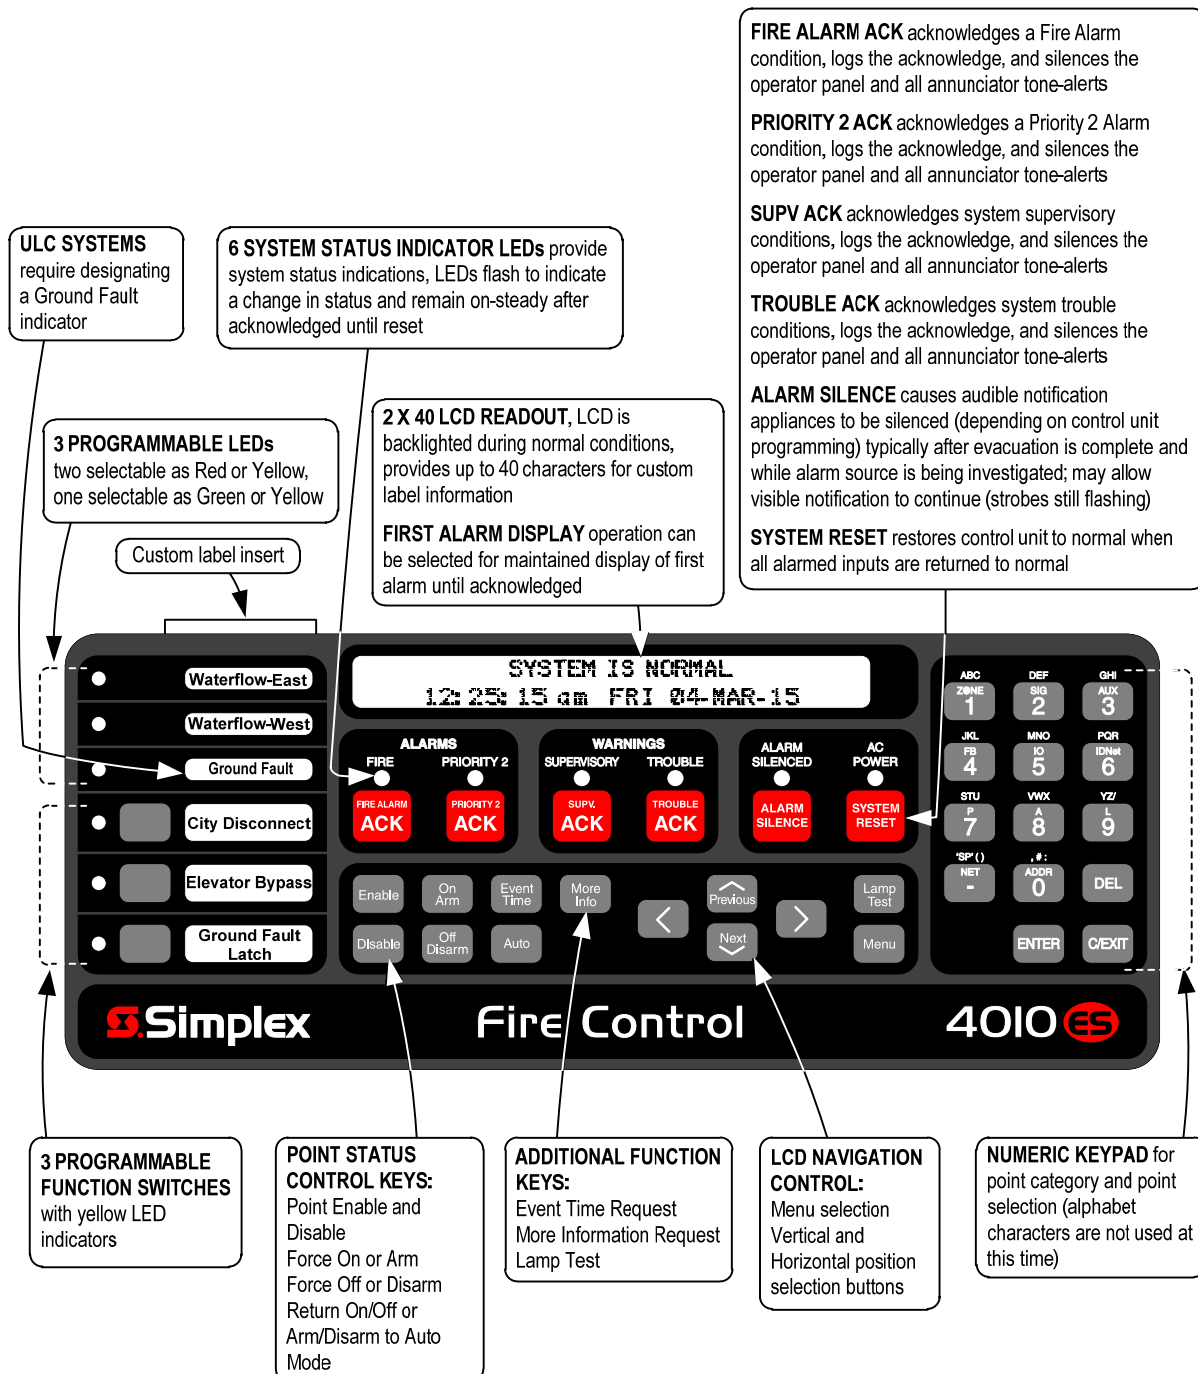

Compatible Peripheral Devices

The 4010ES is compatible with an extensive list of remote peripheral devices including printers, PC Annunciators and both conventional and addressable devices including TrueAlarm analog sensors.

Addressable Device Control

Overview. The 4010ES provides standard addressable device communications for IDNet compatible devices. Using a two wire communications circuit, individual devices such as manual fire alarm stations, TrueAlarm sensors, conventional IDC zones, and sprinkler waterflow switches can be interfaced to the addressable controller to communicate their identity and status.

Addressability allows the location and condition of the connected device to be displayed on the operator interface LCD and on remote system annunciators. Additionally, control circuits (fans, dampers, etc.) may be individually controlled and monitored with addressable devices.

Addressable Operation. Each addressable device on the communication channel is continuously interrogated for status condition such as: normal, off-normal, alarm, supervisory, or trouble. Both Class B and Class A pathway operation are available. Sophisticated poll and response communication techniques ensure supervision integrity and allow for "T-tapping" of the circuit for Class B operation. Devices with LEDs pulse the LED to indicate receipt of a communications poll and can be turned on steady from the control unit.

IDNet Addressable Channel Capacity. The Main System Supply provides an electrically isolated IDNet+ signaling line circuit (SLC) that supports up to 248 addressable monitor and control points intermixed on the same pair of wires. Additional 250 address IDNet 2+2 Modules with four short circuit isolating output loops are available. IDNet+ and IDNet 2+2 Module SLCs are isolated from other system reference voltages to reduce common mode noise interaction with adjacent system wiring.

IDNet+ and IDNet 2+2 SLC Wiring Specifications

Maximum Distance from Control Unit per Device Load	0 to 125 126-250	4000 ft (1219 m); 50 ohms 2500 feet (762 m); 35 ohms
Total Wire Length Allowed With "T" Taps for Class B Wiring		Up to 12,500 ft (3.8 km); 0.60 μ F
Maximum Capacitance Between IDNet Channels		1 μ F
Wire Type and Connections		Shielded or unshielded, twisted or untwisted wire*
Connections		Terminals for 18 to 12 AWG (0.82 mm ² to 3.31 mm ²)
Installation Instructions		579-989

Compatibility includes: IDNet communicating devices and TrueAlarm sensors *including* QuickConnect and QuickConnect2 sensors; see data sheet S4090-0011 for additional reference

* Some applications may require shielded wiring. Review your system with your local Simplex product supplier.

TrueAlarm System Operation

Addressable device communications include operation of TrueAlarm smoke and temperature sensors. Smoke sensors transmit an output value based on their smoke chamber condition and the CPU maintains a current value, peak value, and an average value for each sensor.

Status is determined by comparing the current sensor value to its average value. Tracking this average value as a continuously shifting reference point filters out environmental factors that cause shifts in sensitivity.

Programmable sensitivity of each sensor can be selected at the control unit for different levels of smoke obscuration (shown directly in percent) or for specific heat detection levels. To evaluate whether the sensitivity should be revised, the peak value is stored in memory and can be easily read and compared to the alarm threshold directly in percent.

CO sensor bases combine an electrolytic CO sensing module with a TrueAlarm analog sensor to provide a single multiple sensing assembly using one system address. The CO sensor can be enabled/disabled, used in LED/Switch modes and custom control, and can be made public for communication across a fire alarm Network. (refer to data sheet S4098-0052 for details)

TrueAlarm heat sensors can be selected for fixed temperature detection, with or without rate-of-rise detection. Utility temperature sensing is also available, typically to provide freeze warnings or alert to HVAC system problems. Readings can be selected as either Fahrenheit or Celsius.

TrueSense Early Fire Detection. Multi-sensor 4098-9754 provides photoelectric and heat sensor data using a single 4010ES IDNet address. The control unit evaluates smoke activity, heat activity, *and their combination*, to provide TrueSense early detection. For more details on this operation, refer to data sheet S4098-0024.

Diagnostics and Default Device Type

Sensor Status. TrueAlarm operation allows the control unit to automatically indicate when a sensor is almost dirty, dirty, and excessively dirty. The NFPA 72 requirement for a test of the sensitivity range of the sensors is fulfilled by the ability of TrueAlarm operation to maintain the sensitivity level of each sensor. CO Sensors track their 10 year active life status providing indicators to assist with service planning. Indicators occur at: 1 year, 6 months, and when end of life is reached.

Modular TrueAlarm sensors use the same base and different sensor types (smoke or heat sensor) and can be easily interchanged to meet specific location requirements. This allows intentional sensor substitution during building construction when conditions are temporarily dusty. Instead of covering smoke sensors (causing them to be disabled), heat sensors may be installed without reprogramming the control unit. The control unit will indicate an incorrect sensor type, but the heat sensor will operate at a default sensitivity to provide heat detection for building protection at that location.

Master Controller (CPU)

- The 4010ES Master Controller includes dedicated 2GB compact flash Mass Storage memory for on-site system information storage and convenient Ethernet service port access
- Convenient front Control Unit accessed Ethernet port for quick and easy download of site-specific programming
- AND, firmware enhancements are made via software downloads to the on-board flash memory
- Every downloaded job is automatically stored to Compact flash without overwriting earlier versions providing a means for recovering previous configurations
- Downtime is reduced because the system stays running during download
- Modifications can be uploaded as well as downloaded for greater service flexibility
- Mass Storage allows job specific files to be stored in the control unit such as test and inspection reports, record drawings, specifications, and more.
- Ethernet connectivity options include Building Network Interface Module (BNIC) and SafeLINC Internet Interface
- RUI (Remote Unit Interface) communications port supports either Class B or Class A operation for remote annunciation equipment

Main System Supply

The main system supply provides the power source and the input/output connections for the basic 4010ES control unit. The main features are listed in the basic control unit description below.

Basic Control Unit Description (Continued)

4010ES Control Units include:

- An operator interface, master controller with 2GB compact flash, IDNet or MX Loop addressable device SLC(s) configurable for Class B or Class A operation
- 8 A power supply with up to 2 A of auxiliary power, 110 Ah (UL)/50 Ah (ULC) battery charger (33 Ah max in 1 bay cabinet, 50 Ah max with 4100-0650 battery shelf in two bay control cabinet); 4 Class A or Class B NACs rated @ 3 A each for Special Application Appliances, selectable for synchronized strobe, or SmartSync horn/strobe operation over two wires; and 2 A for Regulated 24 DC operation; 1 programmable auxiliary relay rated for 2 A @ 32 VDC
- 1 RUI Class B or Class A communications port for remote annunciation devices, cabinet and door.
- Support for up to 20 internal and external card addresses. Other standard options may be provided depending on model (see basic control unit model selection below for additional details on specific models).

8-Point Zone/Relay Module Details:

- **Select as IDC or Relay;** configure up to 8, Class B IDCs, or up to 4, Class A IDCs; or up to 8, Relay outputs rated 2 A resistive @ 30 VDC (N.O. or N.C.); or combinations of IDCs and Relays; each zone is separately configurable as an IDC or Relay output
- **IDC Support.** Each IDC supports up to 30, two-wire devices. Zone relay modules may be powered directly from the control unit power supply or through the optional 25 VDC regulator module where required for 2-wire detector compatibility (refer to 2-Wire Detector Compatibility document 579-832 for additional details).
- **IDC EOL resistor values are selectable as:** 3.3 kΩ, 2 kΩ, 2.2 kΩ, 3.4 kΩ, 3.9 kΩ, 4.7 kΩ, 5.1 kΩ, 5.6 kΩ, 6.34/6.8 kΩ, and 3.6 kΩ + 1.1 kΩ; see instructions for more details

Basic Control Unit Model Selection - 1 Bay Control Units

Note: Supervisory and Alarm current specifications are for determining battery standby requirements. Current specifications include an active RUI channel. Models with an IDNet channel include 20 IDNet device LEDs activated in alarm. Models with MX communications include module base current. Actual IDNet or MX channel device current is not included, refer to page 6 for details. For models with 48 LED Annunciation, alarm also includes 24 LEDs activated.

Model*	Control Unit Color	Language & Voltage	Listing	Features	Supv. Current	Alarm Current	Available Option Blocks
4010-9401(BA)	Red	English 120 VAC	UL, FM	Basic Control Unit with 2x40 LCD Operator Interface and (1) Two-loop Isolated IDNet+ Communications Channel, Class A or Class B operation, with support for up to 248 addressable IDNet points	316 mA	430 mA	3 4"x5" blocks
4010-9402(BA)	Platinum						
4010-9501(BA)	Red	English 220 - 240 VAC	UL, ULC, FM	Same features as above with 48 LED annunciation	336 mA	495 mA	
4010-9502(BA)	Platinum						
4010-9403	Red	English 120 VAC	UL, ULC, FM	Same features as above with 48 LED annunciation	336 mA	495 mA	
4010-9404	Platinum						
4010-9503BA	Red	English 220 - 240 VAC	UL	Basic Control Unit with 2x40 LCD Operator Interface and (1) MX Loop Channel Class A or B with support for up to 250 addressable MX Loop points	346 mA	415 mA	1 4"x5" block

* **Note:** (BA) indicates model is available either with or without the BA suffix. Model numbers ending in BA are assembled in the USA.

Basic Control Unit Model Selection - 2 Bay Control Units

Note: Supervisory and Alarm current specifications are for determining battery standby requirements. Current specifications include an active RUI channel. Models with IDNet channels include 20 IDNet device LEDs activated in alarm per channel. Models with MX communications include unloaded module current only. Actual IDNet or MX channel device current is not included, refer to page 6 for details.

Model*	Control Unit Color	Language & Voltage	Listings	Features	Available Option Blocks	Supv. Current	Alarm Current
4010-9421(BA)	Red	English 120 VAC	UL, FM	Basic Control Unit with 2x40 Operator Interface, (1) Two-loop isolated IDNet+ Communications Channel and (1) Four-loop Isolated IDNet 2+2 Communications Channel Module, Class A or Class B operation, with support for up to 498 addressable IDNet points	10 4"x5" blocks	391 mA	545 mA
4010-9422(BA)	Platinum						
4010-9423	Red		UL, ULC, FM	Same features as above with 48 LED annunciation; alarm current includes 24 annunciator LEDs activated		398 mA	496 mA
4010-9428	Platinum						
4010-9425(BA)	Red		UL, FM	Same as 4010-9412(BA) and 4010-9422(BA) except with InfoAlarm Operator Interface		391 mA	545 mA
4010-9426(BA)	Platinum						
4010-9521(BA)	Red	English 220 - 240 VAC	UL, FM	Basic Control Unit with 2x40 Operator Interface, (1) Two-loop isolated IDNet+ Communications Channel and (1) Four-loop Isolated IDNet 2+2 Communications Channel Module, Class A or Class B operation, with support for up to 498 addressable IDNet points	11 4"x5" blocks	509 mA	366 mA
4010-9522	Platinum						
4010-9526BA	Platinum						
4010-9523BA	Red		UL	Basic Control Unit with 2x40 Operator Interface and (2) MX Loop Channels Class A or B with support for up to 500 addressable MX Loop points	7 4"x5" blocks	446 mA	515 mA
4010-9527BA	Red						
					Basic Control Unit with InfoAlarm Operator Interface and (1) MX Loop Channel Class A or B with support for up to 250 addressable MX Loop points	9 4"x5" blocks	428 mA

* Products with suffix "BA" are assembled in the USA.

Addressable Device Load Specifications for Battery Standby

Addressable Channel	Device Load	Supervisory Current	Alarm Current
IDNet+ and IDNet 2+2 Channel Device Currents (20 device LEDs in alarm are included with control unit and module currents) Supervisory = 0.8 mA per device Alarm = 1 mA per device	With 250 Devices Add	200 mA	250 mA
	With 125 Devices Add	100 mA	125 mA
	With 50 Devices Add	40 mA	50 mA
MX Loop Card	With 250 devices Add	1.135 A	1.135 A
25V Regulator for MX Loop	4 A output Alarm, 2.5 A Standby Add	4.68 A	3.0 A
	3.5 A output Alarm, 2.0 A Standby Add	4.2 A	2.4 A
	3.0 A output Alarm, 1.5 A Standby Add	3.6 A	1.8 A
	2.5 A output Alarm, 1.0 A Standby Add	2.87 A	1.2 A
	2.0 A output Alarm, 0.5 A Standby Add	2.4 A	630 mA

Block Space Option Card Selection

Note: Maximum block option module quantities may require 2 bay cabinets, 1 bay cabinets are limited to 3 option block spaces total. Refer to diagrams on pages 2 and 9 for Option Module availability. Supervisory and Alarm current specifications consider no load on addressable channels except as noted (see addressable device load specifications for device load battery standby)

Single Block Option Modules

Model	Features	Supervisory Current	Alarm Current	Option Block Usage	
4010-9912	Serial DACT; Note: Must mount in Block D under Main System Supply	30 mA	40 mA	1 Block (must mount in top bay, block D)	
4010-9908	4 Point Aux Relay Module	15 mA	60 mA	1 Block (11 maximum)	
4010-9916	Voltage Regulator Module, 22.8 to 26.4 VDC (25 VDC nominal); isolated and resettable output; includes earth detection circuit and trouble relay for status monitoring. One 4010-6305 harness (see below) is required for each 4010-9935 module powered from the 4010-9916.	3 A maximum with 2.5 A load	4.9 A maximum with 4 A load	1 Block (1 maximum)	
4010-9918	Dual RS-232 Module	60 mA	60 mA	1 Block (3 maximum)	
4010-9915	BACpac Ethernet Portal Module; requires 4010-9918 RS-232 Module (no address required)	123 mA	123 mA	1 Block (3 maximum)	
4010-9901	VESDA HLI	60 mA	60 mA	1 Block (1 maximum)	
4010-9935	8 point zone/relay 4x5" flat module. Mounts in any open block in a master controller or expansion bay. Alarm current shown is for 8 Class B IDCs using 3.3K end-of-line-resistors with 4 IDCs in alarm and 4 IDCs in standby. Standby current shown is for all 8 IDCs in standby. Detector current is added separately. Refer to 579-1236 Zone/Relay Module Installation Instructions for more information.	83 mA	351 mA	1 block (11 maximum)	
4010-6305	25V regulator harness for 8 point zone/relay module. One required for each 8 point zone/relay module to be powered by the 4010-9916 25V regulator module. A maximum quantity of (5) 8 point zone/relay modules can be powered from the 4010-9916 25V regulator module.	N/A	N/A	N/A	
4010-9929	IDNet 2+2 Module, 250 point capacity; electrically isolated output with four short circuit isolating Class B or Class A output loops; alarm currents for 50 and above devices includes 20 device LEDs in alarm; see page 6 for individual device currents	No device	50 mA	60 mA	1 Block (3 maximum)
		50 devices	90 mA	150 mA	
		125 devices	150 mA	225 mA	
		250 devices	250 mA	350 mA	

Dual Vertical Block (Flat) Modules

Model	Features	Option Block Usage	Supervisory Current	Alarm
4010-9928	For 1-Bay Control Units Only: Dual Vertical Block Card Mounting Kit, allows selecting two, dual Vertical Block (flat) modules from the list below; mounts at right angle to chassis (note block usage details)	2 Vertical Blocks (1 max, mounts in top bay, block space A & B only)	NA	NA
4010-9922	Modular Network Interface Card (requires up to two media cards from below)	2 Vertical Blocks (1 max)	30 mA	30 mA
4010-9818	Network Media Card Wired	N/A (mounts to 4010-9922)	55 mA	55 mA
4010-9819	Network Media Card Fiber Optic		25 mA	25 mA
4010-9914	Building Network Interface Card	2 Vertical Blocks (1 max)	236 mA	236 mA
4010-9923*	SafeLINC Internet Interface	2 Vertical Blocks (1 max)	115 mA	115 mA
4010-9924*	Modem Physical Bridge Class B	2 Vertical Blocks (4 max)	193 mA	193 mA
4010-9925*	Modem Physical Bridge Class X	2 Vertical Blocks (4 max)	246 mA	246 mA
4010-9926**	TCP/IP Physical Bridge Class B	3 Block "L" Shape, requires 2 Vertical Blocks, plus adjacent right side lower Block D, F, or H (2 max)	196 mA	196 mA
4010-9927**	TCP/IP Physical Bridge Class X		236 mA	236 mA

Additional Option Modules with Special Option Block Usage

Model	Features	Option Block Usage	Supervisory Current	Alarm
4010-9917	MX Loop Card supports up to 250 points	2 Vertical Blocks (not compatible with 4010-9928)	100 mA (no devices)	100 mA (no devices)

* UL, ULC, and CSFM Listed. ** FM Approved only.

Additional Control Unit Feature Selection (block space is not used)

Model	Features	Supervisory Current	Alarm Current	Mounting Requirements
4010-9909	City Connect Module w/ disconnect switches	20 mA	36 mA	Mounts on Main System Supply (1 max)
4010-9910	City Connect Module	20 mA	36 mA	
4010-9911	Alarm Relay Module	15 mA	37 mA	
4100-5128	Battery Distribution Terminal Block, mounts to side of box, required when battery connection leaves the 4010ES box (also used in the 4100ES fire alarm control unit)			

Miscellaneous Accessories

LED Kits

Model	Description
4100-9843	8 Yellow LED Kit
4100-9844	8 Green LED Kit
4100-9845	8 Red LED Kit
4100-9855	8 Blue LED Kit
4100-0650	Battery Shelf, required for 50 Ah batteries (2 Bay cabinets only)


End User Programming Tools

Model	Description
4100-8802	End User Programming Unit Software
4100-0292	Custom Label Editing (USB Dongle)
4100-0295	Port Vectoring Setup and Control (USB Dongle)
4100-0296	Access Level/Passcode Editing (USB Dongle)
4100-0298	WalkTest Configuration Setup and Control (USB Dongle)

Factory Programming Options

Model	Description
4010-8810	Factory Programming (select)
4010-0831	Custom Labels and Control Unit Programming (requires 4010-8810)


Cabinet Dimension Reference

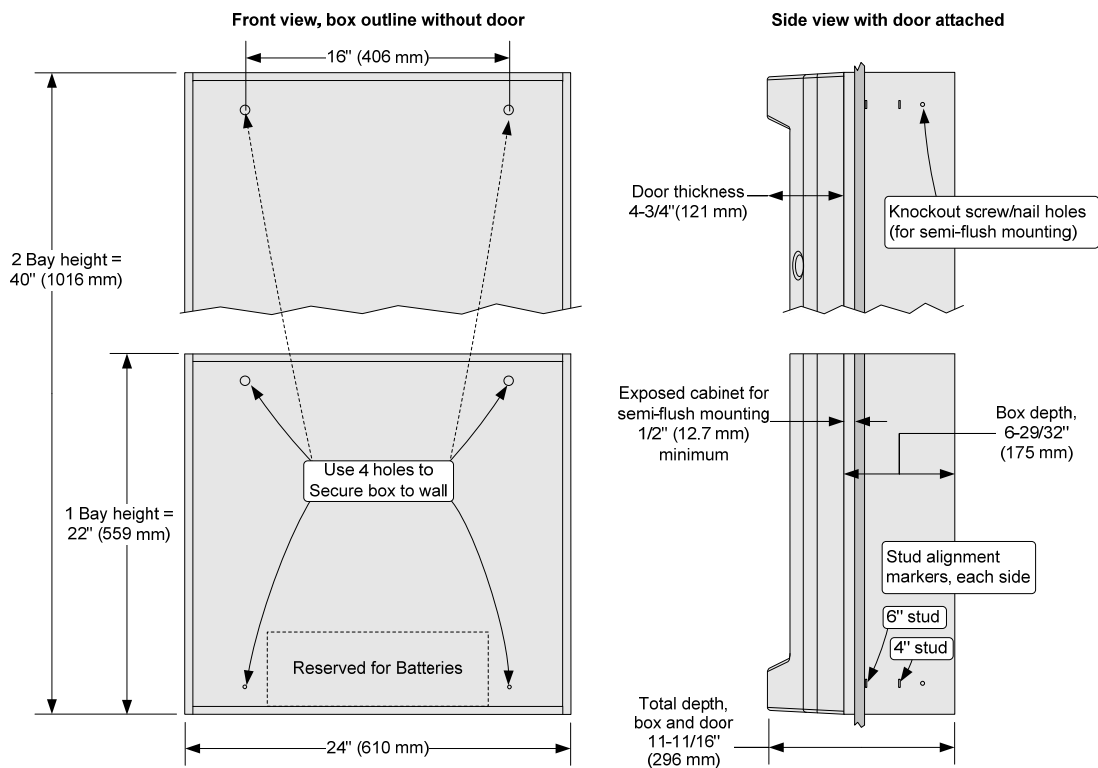

Cabinet One and Two Bay Loading Reference

First bay of one-bay cabinet has 3 available 4"x5" block spaces for additional option cards


Note: Some spaces may be used by basic control unit features, see pages 5 and 6 for available space

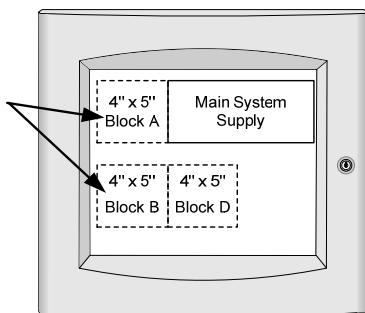

First bay of two-bay cabinet has 3 available 4"x5" block spaces for additional option cards

Second bay of two-bay cabinet has 8 additional 4"x5" block spaces for additional option cards (2 horizontal rows of 4 blocks)

Note: Some spaces may be used by basic control unit features, see pages 5 and 6 for available space

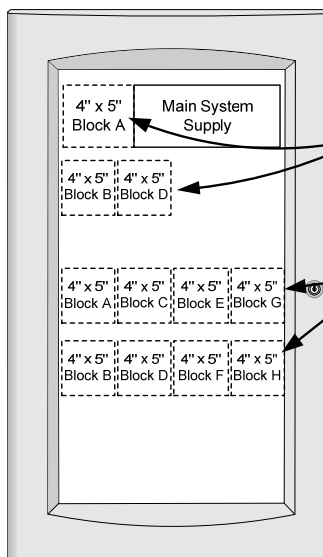

Additional Compatible Equipment and Reference

Subject	Data Sheet	Subject	Data Sheet	Subject	Data Sheet
4010 ES Agent Release Applications	S4010-0007	4009 IDNet NAC Extender	S4009-0002	4003EC Voice Control Unit	S4003-0002
Agent Release Accessories	S2080-0010	BACpac Ethernet Module	S4100-0051	Remote Battery Charger	S4081-0002
Remote InfoAlarm Command Center	S4010-0009	4602 Series SCU/RCU	S4602-0001	Network Physical Bridge	S4100-0057
Serial DACT (SDACT)	S2080-0009	Addressable Device Compatibility, IDNet Communication Sensors and Devices	S4090-0011	Interface to VESDA Air Aspiration Detection Systems	S4100-0026
Fire Alarm Network Overview	S4100-0055			120 VAC Remote Printer	S4190-0011
MX Loop Interface Module	S4100-0059	4606-9102 Remote LCD Annunciator	S4606-0002	PC Annunciator	S4190-0013
TCP/IP Physical Bridge	S4100-0029	Building Network Interface	S4100-0061	Multi-Signal Fiber Optics	S4100-0049
Graphic I/O Modules	S4100-0005			Network Communications	S4100-0056
110 Ah Batteries & Cabinets	S2081-0012				

General Specifications

AC Input Current	120 VAC Models	4 A maximum, 120 VAC @ 60 Hz nominal	
	220-240 VAC Models	2 A maximum, 220/230/240 VAC @ 50 or 60 Hz	
Power Supply Output Ratings (nominal 28 VDC on AC, 24 VDC on battery backup)	Total Power Supply Output Rating	Including module currents and auxiliary power outputs; 8 A total for "Special Application" appliances; 4 A total for "Regulated 24 DC" power (see below for details)	Output switches to battery backup during mains AC failure or brownout conditions
	Auxiliary Power Tap		
Special Application Appliances, maximum of 70 appliances per NAC	Simplex 4901, 4903, 4904, and 4906 Series horns, strobes, and combination horn/strobes and speaker/strobes (contact your Simplex product representative for compatible appliances)		
Regulated 24 DC Appliances	Power for other UL listed appliances; use associated external synchronization modules where required		
Battery Charger Rating (sealed lead acid batteries)	Battery capacity range	UL listed for battery charging of 6.2 Ah up to 110 Ah; ULC listed for charging up to 50 Ah batteries. For 1 bay cabinets, batteries above 33 Ah require separate cabinet. For 2 bay cabinets, battery capacity above 50 Ah requires a separate cabinet. See data sheet 2081-0012 for further details.	
	Charger characteristics and performance	Temperature compensated, dual rate, recharges depleted batteries within 48 hours per UL Standard 864; to 70% capacity in 12 hours per ULC Standard S527	
Environmental	Operating Temperature	32° to 120°F (0° to 49° C)	
	Operating Humidity	Up to 93% RH, non-condensing @ 90° F (32° C) maximum	
Additional Technical Reference	Installation Instructions	579-989	
	Operating Instructions	579-969	

4010ES Card Address Allocation

The 4010ES has a maximum Internal and External Card Address Limit of 20 Card Addresses. Use the Table below to calculate 4010ES card address allocation.

INSTRUCTIONS: Below is a list of 4010ES equipment and the quantity of card addresses they consume

- 1) For the applicable control unit, write in the Card Address Consumption value in the Card Address Allocation column.
(Note: Only select 1 control unit)
- 2) For the option cards to be installed on the 4010ES, write in the Card Address Consumption value in the Card Address Allocation column.
- 3) Total the Card Address Allocation column (total must not exceed 20).

Model*	Description	Card Address Consumption	Card Address Allocation
Control Units (Select One)			
4010-9401(BA) 4010-9402(BA) 4010-9501(BA) 4010-9502(BA) 4010-9503BA	2x40 Display, (1) IDNet+ Communications Channel; or (1) MX Channel, 1-Bay Box	2	
4010-9403 4010-9404 4010-9405	2x40 Display, (1) IDNet+ Communications Channel, 48 Pluggable LED Module, 1-Bay Box	3	
4010-9423 4010-9428	2x40 Display, (1) IDNet+ and (1) IDNet2+2 Communications Channel, 48 Pluggable LED Module, 2-Bay Box	4	
4010-9421(BA) 4010-9422(BA) 4010-9521(BA) 4010-9522 4010-9523BA	2x40 Display, (1) IDNet+ Communications Channels and (1) IDNet 2+2 Communications Channel; or 2 MX Communications Channels, 2-Bay Box	3	
4010-9425(BA) 4010-9426(BA)	InfoAlarm Display, (1) IDNet+ and (1) IDNet 2+2 Communications Channel, 2-Bay Box	4	
4010-9526BA 4010-9527BA	InfoAlarm Display, (1) IDNet+ Communications Channel; or 1 MX Communications Channel, 2-Bay Box	3	
*Note: (BA) means available with or without BA suffix; products with suffix "BA" are assembled in the USA			
Control Unit Option Cards (Select As Required)			
4010-9901	Flat VESDA HLI Card	1	
4010-9922	Flat Network Card	1	
4010-9908	4 Point Flat Aux Relay Module	1	
4010-9912	Serial DACT	1	
4010-9923	SafeLINC Internet Interface Card	1	
4010-9914	Building Network Interface Card	1	
4010-9917	MX Loop Card	1	
4010-9918	Dual RS-232 Module	1	
4010-9935	8 point zone/relay 4x5" flat module	1	
4010-9929	IDNet 2+2 Communications Module	1	
Remote Annunciation (Select As Required)			
4100-9401	Remote	Red Cabinet, English	2
4100-9403	Remote	Platinum Cabinet, English	2
4100-9421	InfoAlarm	Red Cabinet, French	2
4100-9423	Command	Platinum Cabinet, French	2
4100-9441	Center	Red Cabinet, with blank inserts for key labels	2
4100-9443	Center	Platinum Cabinet, with blank inserts for key labels	2
4606-9102	4010ES RUI LCD Annunciator, English		1
4606-9102BA	4010ES RUI LCD Annunciator, English		1
4606-9102CF	4010ES RUI LCD Annunciator, French		1
4602-9101	Status Command Unit (SCU) LED Annunciator		1
4602-9102	Remote Command Unit (RCU) LED Annunciator w/control		1
4602-9150	Graphic I/O RCU/SCU Assembly for custom annunciator Control Units		1
4602-7101	Graphic I/O RCU/SCU Assembly for custom annunciator Control Units		1
4602-7001	RCU for cabinet mount		1
4602-6001	SCU for cabinet mount		1
4100-7401	24 Point I/O Graphic Module (requires mounting cabinet)		1
4100-7402	64/64 LED Switch Controller for custom annunciator Control Units		1
4100-7403	32 Point LED Driver Module for custom annunciator Control Units		1
4100-7404	32 Point Switch Input Module for custom annunciator Control Units		1
Total Card Addresses (Not to Exceed 20)		TOTAL	

Tyco, SIMPLEX, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. VESDA is a trademark of Xtralis Pty Ltd. NFPA 72 and National Fire Alarm and Signaling Code are registered trademarks of the National Fire Protection Association (NFPA). ASHRAE and BACnet are trademarks of ASHRAE, American Society of Heating, Refrigeration, and Air Conditioning Engineers.



Tyco Fire Protection Products • Westminster, MA • 01441-0001 • USA

S4010-0006-11 8/2017

www.simplex-fire.com

© 2014 Tyco Fire Protection Products. All rights reserved. All specifications and other information shown were current as of document revision date and are subject to change without notice.