

Fire Monitoring System

www.boschsecurity.com



BOSCH
Invented for life




- ▶ Monitoring of single or networked panels
- ▶ Management of up to 5000 detection points
- ▶ Simultaneous connection of up to 10 clients
- ▶ Extensive logging of events and operations
- ▶ User friendly installation and configuration

The Fire Monitoring System is a graphical user interface for displaying and monitoring small to medium fire alarm systems with up to 5000 detection points. It is compatible with the fire alarm panels FPA-5000 and FPA-1200.


System overview

The fire panels FPA-1200 or FPA-5000 can be connected to the Fire Monitoring System via an Ethernet connection. The connection must be enabled with an ADC-5000-OPC license key. For each Fire Monitoring System only one license key is needed.

An exclusive Ethernet network in order to set up a central fire alarm network (1) is required. For security and reliability reasons, no networks used for any other purpose (2) may be part of this special network environment. The Fire Monitoring System has to be part of this exclusive fire alarm Ethernet network without direct access to the Internet (3). If an internet connection is established to receive the Fire Monitoring System license, this internet connection must be removed before the fire alarm network is put into operation. Only recommended accessories may be used.

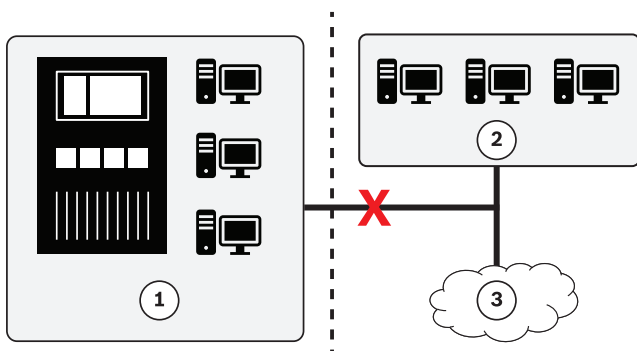


Single panel connection
TX Ethernet cable (copper)

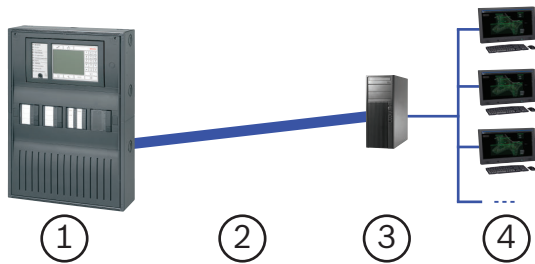


1	Fire Alarm Panel (incl. ADC-5000-OPC license key)
2	Peer-to-Peer connection (100 m max.)
3	Fire Monitoring System: server
4	Fire Monitoring System: clients

Single panel connection
FX Ethernet cable (fiber optic)

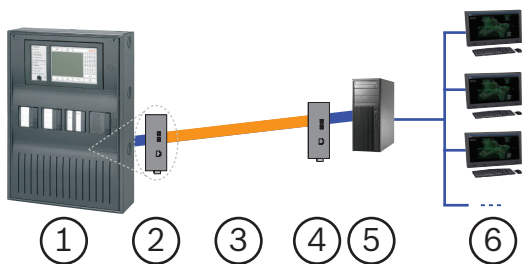

1	Fire Alarm Panel (incl. ADC-5000-OPC license key)
2	Media converter
3	Singlemode (SM)/Multimode (MM) Fiber (40 km/2 km max.)
4	Media converter
5	Fire Monitoring System: server
6	Fire Monitoring System: clients


Panel network connection
TX Ethernet cable (copper)

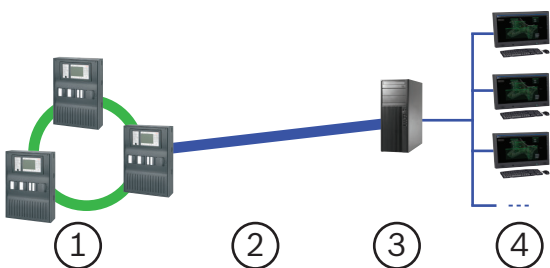

1	CAN Network (incl. ADC-5000-OPC license key in 1 panel)
---	---

2	Peer-to-Peer connection (100 m max.)
3	Fire Monitoring System: server
4	Fire Monitoring System: clients

Panel network connection
FX Ethernet cable (fiber optic)

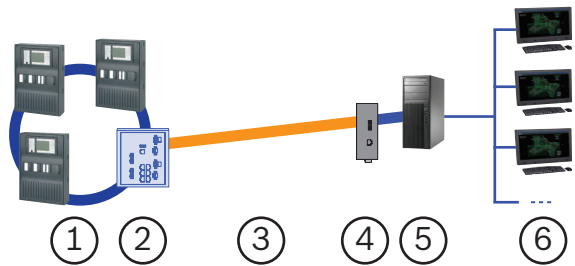

1	Ethernet network (incl. ADC-5000-OPC license key in 1 panel)
2	Ethernet switch
3	Singlemode (SM)/Multimode (MM) Fiber (40 km/2 km max.)
4	Media Converter
5	Fire Monitoring System: server
6	Fire Monitoring System: clients

Functions

User friendly installation and operation

A wizard guides through the installation as well as the configuration in a few steps. Automatic transfer of the panel configuration to the software allows comfortable object management (e.g. predefined sensors). To add an object, the operator simply clicks on the desired position on the map. System devices can be allocated to objects through a drop down menu.

Importing floor plans

The Fire Monitoring System supports an easy import of various file formats, including dwg and dxf. The software automatically allocates the detector list of the fire panel to the floor plan.

Extended map management

In each map, specific areas can be defined to create sub-maps. In case of event there is an automatic zoom into the relevant sub-map. The operator can manually zoom into maps or sub-map and a pan function allows to move the map in any direction.

Object management on the map

A single sensor or a group of devices can be selected and be moved into another map by a simple Drag & Drop operation. Copy and paste of objects in different maps is supported as well.

User rights management

The authorizations are based on customizable groups. The rights to access to e.g. different sources, maps, alarm zones and devices are managed at group level. Each user can be part of one or more groups.

E-mail notification

Events can be forwarded by e-mail to users according to their user settings.

Event logging

In the event log all procedures and actions are recorded. You can search according to various criteria, cluster and generate statistics, make backups or print the event log. The reports can be exported to Excel.

Connectivity

A standalone fire alarm panel or a panel network with up to 5000 detection points in total can be connected to the Fire Monitoring System.

Language versions

The Fire Monitoring System is available in following languages: English, German, Italian, Polish, Dutch, French, Russian, Spanish, Turkish, Portuguese, Romanian.

The user interface language can be individually defined by the user.

Installation/configuration notes

Hardware Preconditions

- Processor: dual core (1,8 GHz or more)
- RAM: Minimum 2 GB
- Free Disk Space: Minimum 1 GB
- Network card 100 Mbps
- Monitor resolution: Minimum 1366x768 pixel

Software Preconditions

- Windows 7 (32 bit and 64 bit)
- Windows 8 (32 bit and 64 bit)
- Windows 10 (32 bit and 64 bit)
- Microsoft Office (Release 2007 / 2010 / 2013)
- .NET Framework from version 3.5.1

Ordering information

Fire Monitoring System FSM-2500

Monitoring Software to manage up to 2500 detection points.

Order number **FSM-2500**

Fire Monitoring System FSM-5000

Monitoring Software to manage up to 5000 detection points.

Order number **FSM-5000**

Evolution pack FSM-2500

Yearly maintenance agreement for upgrades.

Order number **FSM-2500-EP**

Evolution pack FSM-5000

Yearly maintenance agreement for upgrades.

Order number **FSM-5000-EP**

Accessories

Licence Key OPC

Enables reliable communication between the OPC server and the FPA-1200 panel or FPA-5000 panel or networks.

Order number **ADC-5000-OPC**

Ethernet Switch MM

Order number **BPA-ESWEX-RSR20**

Ethernet Switch SM

Order number **RSR20-0800S2S2T**

Media Converter MM

Order number **EL1141-10B-BH**

Media Converter SM

Order number **EL1141-B0B-BH**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
203 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com