

HTV

ALUMINIUM HOUSING FOR THERMAL CAMERAS

MAIN FEATURES

Germanium window
 IP66/IP67 (with cable glands or optional sealing rings)
 Pre-arranged for internal cable management bracket
 Side opening, easy camera servicing
 Available accessories: heater, camera power supply, alarm tamper switch

DESCRIPTION

This housing has been designed to fit thermal cameras with compact lenses for vision even in total darkness.

It can be used for a wide range of day/night surveillance systems, such as monitoring and rescue in the event of a fire, public safety or airport, industrial and environmental surveillance.

The frontal opening system allows easy access to the camera and all internal connections.

A wide range of accessories for mounting the equipment is available thereby satisfying all installation needs.



HTV

AVAILABLE MODELS				
Model Number	Housing sunshield	Power supply 230Vac	Power supply 24Vac	Ø germanium window
HTV32K1A000	✓	✓	–	50mm
HTV32K2A000	✓	–	✓	50mm

TECHNICAL DATA**GENERAL**

Constructed from aluminium
 Sunshield in ABS
 Epoxypolyester powder painting, RAL9002 colour
 Stainless steel external screws

MECHANICAL

Cable glands: 3xM16
 Dimensions (WxHxL): 176x160x514mm (6.9x6.3x20.2in)
 Unit weight: 4kg (8.8lb)

ELECTRICAL

Supply voltage/Current consumption (empty version):

- From 12Vdc up to 24Vdc, 1A max
- From 12Vac up to 24Vac, 1A max, 50/60Hz
- From 120Vac up to 230Vac, 400mA max, 50/60Hz

Supply voltage/Current consumption (version with heater, Ton 15°C±3°C (59°F±5°F), Toff 22°C±3°C (72°F±5°F)):

- From 12Vdc up to 24Vdc, 3A max
- From 12Vac up to 24Vac, 3A max, 50/60Hz
- From 120Vac up to 230Vac, 400mA max, 50/60Hz

Camera power supply:

- V_{IN} from 100Vac up to 240Vac, 50/60Hz
 V_{OUT} 12Vdc, 1A
- V_{IN} 230Vac, 50/60Hz
 V_{OUT} 24Vac, 400mA, 50/60Hz

HOUSING'S WINDOW

Material: Germanium

Dimensions:

- Diameter: 55mm (2.1in)
- Thick: 2mm (0.07in)

External treatment: Antiscratch (Hard Carbon Coating- DLC), Antireflection

Internal treatment: Antireflection

Spectral range: from 7.5µm up to 14µm

- Medium transmittance (from 7.5µm up to 11.5µm): 90%
- Medium transmittance (from 11.5µm up to 14µm): 77%

ENVIRONMENT

Indoor/Outdoor

Operating temperature (with heater): From -20°C (-4°F) up to +60°C (140°F)

CERTIFICATIONS

Electrical safety (CE): EN60950-1

Electromagnetic compatibility (CE): EN50130-4, EN61000-6-3

IP protection degree: EN60529

- IP66/IP67 (with cable glands)
- IP66/IP67 (with bracket with internal cable channel, with sealing rings)
- IP55 (with bracket with internal cable channel)
- IP44 (with double filter for air renewal)

EAC certification

ACCESSORIES

OHEH26	Heater 120Vac/230Vac for HOV, HTV, VERSO, VERSO COMPACT housings
OHEH27	Heating 12Vdc/24Vac for HOV, HTV, HTC, VERSO and VERSO COMPACT housings
OHOVPS1B	Wide range camera power supply IN 100-240Vac - OUT 12Vdc, 15W, for HOV and HTV housing
OHOVPS2B	Camera power supply IN 230Vac - OUT 24Vac, 10VA, for HOV and HTV housings
OHOVTA1	Tamper switch on board with tamper proof screws and key for HOV housing
OHEGBB	Weatherproof junction box
OWBIP2	Sealing rings kit (3xM16) IP66/IP67 for WBOVA2 and WCM4A2 brackets for PUNTO, HOV, HTV, HTC, VERSO, VERSO POLAR, VERSO COMPACT, HEB, HEK housings

RELATED PRODUCTS

PTH300	Horizontal/vertical Pan & Tilt
--------	--------------------------------

BRACKETS AND ADAPTORS

WBJA	Wall mount bracket
WBOVA2	Wall bracket with internal cable channel
WBOV3A2	Wall bracket with internal cable channel, counterplate and support box, not compatible with OHEBVF1, OHEBVF2 and OHEBVF3
WCM3A	Ceiling bracket with ball joint
WCM5A	Ceiling bracket with ball joint
WCM4A2	Ceiling bracket with internal cable channel
WFWCA	Column bracket with joint

SPARE PARTS


OHTV32SUP	Complete upper body
-----------	---------------------

PACKAGE

Model Number	Weight	Dimensions (WxHxL)	Master carton
HTV32K1A000	3.4kg (7.5lb)	19.5x14.5x53cm	4

TECHNICAL DRAWINGS

Sizes in millimeters.

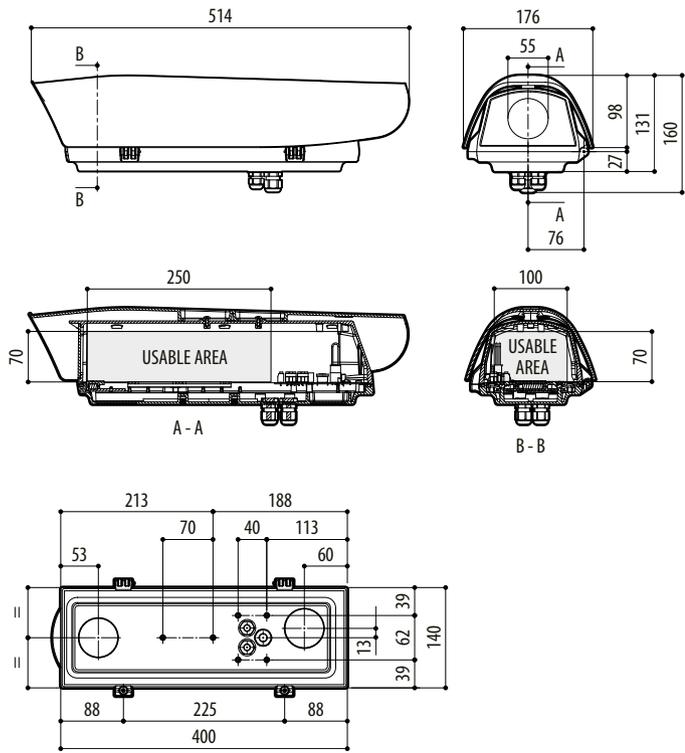

HTV