

FAD-420-HS-EN Duct Smoke Detector

www.boschsecurity.com




BOSCH
Invented for life



- ▶ Use in ventilation systems with air velocities from 1.5 m/s to 20 m/s
- ▶ For the activation of fans, door controls or external display devices an optional Relay Board can be installed
- ▶ A clear section on the frosted cover allows observing the alarm LED of the integrated FAD-425-O-R Detector
- ▶ Control to prevent unwanted removal of the cover
- ▶ Easy installation of the FAD-425-O-R Detector

The FAD-420-HS-EN Duct Smoke Detector with integrated FAD-425-O-R Detector detects smoke in ventilation ducts. Smoke particles in the air are reliably detected and reported to the fire panel by the LSN improved bus system.

System overview

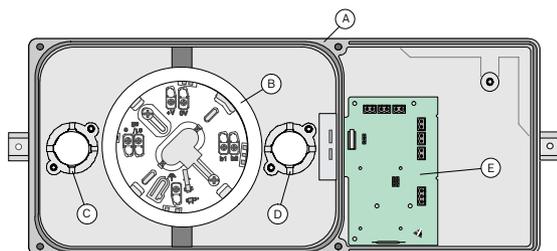

- A Air sampling housing
- B Detector Base for the FAD-425-O-R Detector
- C,D Mounting flange for sample tube or ventilation tube
- E Connection board

Functions

Air from the ventilation duct is constantly directed through the sample tube and the air sampling housing to the purpose-built FAD-425-O-R Detector. Smoke particles in the air are reliably detected and reported to the fire panel by the LSN improved bus system.

Certifications and approvals

Region	Certification	
Europe	CPR	0786-CPR-21151 FAD-420-HS-EN
Germany	VdS	G 211088 FAD-420-HS-EN
Europe	CE	FAP/FAH/FAD-425

Installation/configuration notes

- Air velocities from 1.5 m/s to 20 m/s
- Horizontal or vertical mount of housing
- If a remote indicator is connected, the FAD-RB-DIBT Relay Board **must not** be used!

Parts included

Quant.	Component
1	Air sampling housing with connection board, Detector base and installation material
1	D344-1.5 sample tube (length 45.7 cm)
1	Ventilation tube
2	D344-TF air filter for sample and ventilation tube



Notice

Please note that the FAD-420-HS-EN does not come with the required FAD-425-O-R Detector. The FAD-425-O-R Detector has to be ordered in addition.

Technical specifications

FAD-420-HS-EN Duct Smoke Detector

Electrical

Operating voltage	24 V DC (15 ... 33 V DC)
Maximum current consumption	Approx. 0.5 mA (approx. 0.7 mA when FAD-RB-DIBT Relay Board is installed)
Electromagnetic susceptibility (EMS)	EN 50130-4
Electromagnetic emission (EME)	EN 61000-6-3

Mechanics

Dimensions (H x W x D)	16.5 x 39.5 x 11 cm
Material and Color	
• Housing base	Plastic fiber reinforced, PPE + PS (UL94-V1), grey
• Housing cover	Plastic, PC (UL94-V2), clear
• Weight	Approx. 1.5 kg

Environmental Conditions

Permissible air velocity	1.5 m/s ... 20 m/s
Permissible operating temperature	0 °C ... 50 °C
Permissible storage temperature	-20 °C ... 80 °C
Permissible relative humidity	95 %, non condensing
Protection class as per EN 60529	IP 30

FAD-RB-DIBT Relay Board

Maximum contact load	2 A at 30 V DC
Weight	11 g

Ordering information

FAD-420-HS-EN Duct Smoke Detector

air sampling housing with connection board and detector base FAD-425-O-R. The detector must be ordered in addition.

Order number **FAD-420-HS-EN**

Accessories

FAD-425-O-R Detector for Use in Air Sampling Housing

Analog addressable optical detector for use in air sampling housing FAD-420-HS-EN

Order number **FAD-425-O-R**

FAD-RB-DIBT Relay Board for DIBT Application

relay board for DIBT applications

Order number **FAD-RB-DIBT**

FAA-420-RI Remote Indicator

required if the detector is not directly visible or has been mounted in false ceilings or false floors

Order number **FAA-420-RI**

D344-1.5 Sample Tube

length 45.7 cm (1.5 ft)

Order number **D344-1.5**

D344-3 Sample Tube

length 91.4 cm (3 ft)

Order number **D344-3**

D344-5 Sample Tube

length 1.52 m (5 ft)

Order number **D344-5**

D344-TF Filter for Sample/Ventilation Tube

Replaceable filters for duct detector sampling tubes, available in packages of 20

Order number **D344-TF**

Represented by:

North America:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
203 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

Latin America and Caribbean:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com