



C-9329


Gas Extinguishing Control Relay Module

Description

C-9329 Gas Extinguishing Control Relay Module is to co-operate with GST303 or GST306 Gas Extinguishing Control Panel, to carry out gas release solenoid control and cable monitoring.

Terminals and Installation

Below figure shows the base of the module.

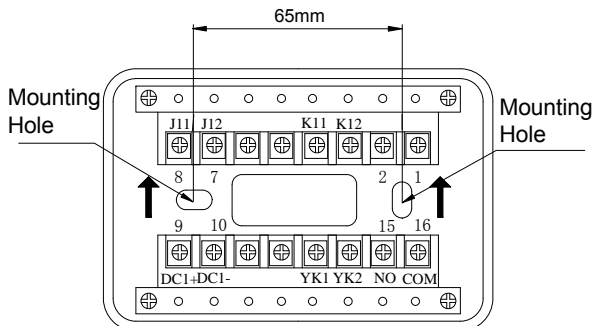

J11, J12: Output terminal, connect with cylinder solenoid valve, short circuit in normal and 24VDC output when activated

K11, K12: Pressure switch input

DC1+, DC1-: Command terminals to corresponding terminals of gas extinguishing control panel.

YK1, YK2: Signal terminals to corresponding terminals of gas extinguishing control panel.

COM, NO: Spare output of gas extinguishing start command


Recommended Cabling

1.5mm² or above fire cable for DC+ & DC-, 1.0mm² or above fire cable for others, all cables subject to local codes.

Application

The module is simply plugged onto the base after cables are connected.

A typical connection is shown below.

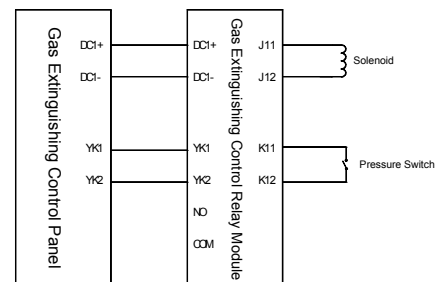

Technical Specification

Output Contact	Rated 30VDC/2A
Ambient Temperature	-10°C ~ +50°C
Relative Humidity	≤95%, non-condensing
Dimensions	120mm×80mm×43mm
Enclosure	ABS, White (RAL9016)
Weight	188g (with base)
Mounting Hole Distance	65mm

Ordering Information and Compatible Products

Part No.	C-9329
Device Name	Gas Extinguishing Control Relay Module
Order Code	1342343
Compatible Products	GST303 Gas Extinguishing Control Panel GST306 Gas Extinguishing Control Panel

Variant Model

Part No.	Order Code	Property
C-9329	1344280	Russian Language