


VESDA VFT-15 Accessories

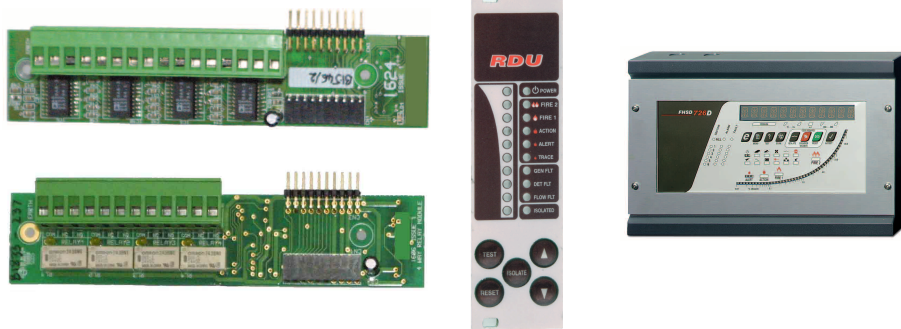

Features

- Remote monitoring, control and status annunciation
- Extra relay contact outputs
- Multiple analog current outputs for retransmission of signals

A range of accessories provide additional functionality for the VESDA VFT-15 detector. With the addition of remote display units (RDU) and plug-in modules, extra functions such as remote monitoring and control, status annunciation, extra relay contact output interfaces, and 4-20mA outputs can be integrated in one central device.

Remote Display Unit and Mini Remote Display Unit

The Remote Display Unit (RDU) allows the VFT-15 to be monitored, controlled and programmed remotely. RS485 communication is used between the detector and the remote display unit. The remote display unit can be configured to monitor any one of the detectors on the network.

The Mini Remote Display Unit (Rack mount RDU) can be configured to monitor any one of the detectors allowing simple remote monitoring and control of detectors.

Relay and Output Modules

The relay and 4-20mA output modules plug onto the standard I/O module in a stackable chain up to 5 per VFT-15 detector.

Relay Module

The main use of relays is to provide individual sector alarms (i.e. fully addressable) on scanning system VFT-15. Each set of four relays may be configured for ALERT, ACTION, FIRE 1, FIRE 2 or Flow Fault or General Fault. The relay contacts are SPDT rated for 24 volts @ 2 Amps.

8-Channel 4 to 20 mA Output Module

This module is typically used for retransmission of flow or smoke levels from devices connected to the unit. The maximum voltage output is 20 volts, the resolution is 16 bits.

VESDA VFT-15 Accessories

Specifications

Remote Display Unit

24 VDC power supply
RS485 communications

Mini Remote Display Unit

24 VDC power supply
RS485 communications
Mountable on 19" rack

4-Channel Relay Module

Form C Relay Contacts (NO-C-NC)
2 A at 24 VDC

8-Channel 4 to 20 mA Output Module

20 VDC maximum output
16 bit resolution
4 to 20 mA output range

Ordering Information

VFT-15 Remote Display	01-V921-15
4 Channel Relay Module	01-E606-01
Output Module - 8 Channel 4-20 mA	01-E624-00
Rack mount RDU RS485	01-E922-01
Blind plate for sub rack	01-E922-00

www.xtralis.com

The Americas +1 781 740 2223 **Asia** +852 2916 8894 **Australia and New Zealand** +61 3 9936 7000
Continental Europe +32 56 24 19 51 **UK and the Middle East** +44 1442 242 330

The contents of this document are provided on an "as is" basis. No representation or warranty (either express or implied) is made as to the completeness, accuracy or reliability of the contents of this document. The manufacturer reserves the right to change designs or specifications without obligation and without further notice. Except as otherwise provided, all warranties, express or implied, including without limitation any implied warranties of merchantability and fitness for a particular purpose are expressly excluded.

This document includes registered and unregistered trademarks. All trademarks displayed are the trademarks of their respective owners. Your use of this document does not constitute or create a licence or any other right to use the name and/or trademark and/or label.

This document is subject to copyright owned by Xtralis AG ("Xtralis"). You agree not to copy, communicate to the public, adapt, distribute, transfer, sell, modify or publish any contents of this document without the express prior written consent of Xtralis.

Doc. no. 18953_01

Part no. 29667

VESDA[®]
by  **xtralis**[™]