


## Conventional MCP electronic module

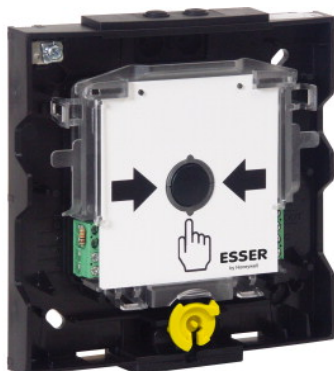

### Part-No. 804900

Approval: VdS, CNBOP

With alarm indicator, suitable for connection to a standard detector zone.

Operating voltage	8 ... 30 V DC
Alarm current @ 9 V DC	9 mA
Alarm display	LED, red
No. of detector/zone	10 detectors per zone (according to VdS)
Application temperature	-20 °C ... 70 °C
Storage temperature	-30 °C ... 75 °C
Connection terminal	max. 2.5 mm <sup>2</sup> (AWG 26-14)
Type of protection	IP 44 (in housing), IP 55 (with accessory)
Housing	PC ASA plastic
Air humidity	< 95 % (non condensing)
Weight	approx. 236 g (with housing)
Detector specification	EN 54-11, Type B
Dimensions	W: 133 mm H: 133 mm D: 36 mm



In combination with the yellow housing (Part No. 704902), the electronic module is approved as an electronic control unit for gas extinguishing systems. The Part No. 804900 electronic module with yellow housing conforms to the EN 12094-3 standard and can be used as an electronic control unit for gas extinguishing systems in dry, non-hazardous industrial premises. Take note, for a LARGE MCP you have to order the electronic module and the MCP housing separately to have a complete MCP.



Electronic module with one piece operating foil printed "ESSER by Honeywell" and turnable "Out of Order" pictogram.