


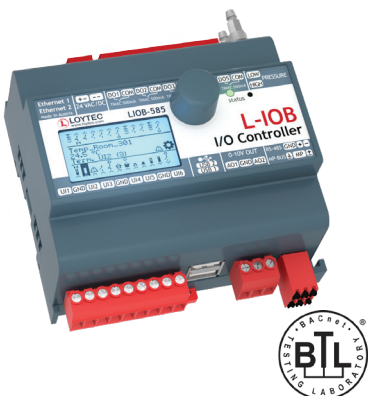

LIOB-585 I/O Controllers are IP-enabled, compact, programmable automation stations for LonMark Systems and BACnet/IP networks with physical inputs and outputs and integrated graphical visualization.

Communication

The LIOB-585 I/O Controller is equipped with two Ethernet ports including a built-in Ethernet switch. This allows for building a daisy chained line topology of up to 20 devices, which reduces costs for network installation. Dual Ethernet port devices also allow the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

Technology data points are automatically exposed as OPC tags for higher level OPC client applications or L-WEB system via the integrated OPC server providing SSL encrypted web services (OPC XML-DA) or UA Secure Conversation (OPC UA). The L-IOB I/O Controllers further allow data exchange over global connections (network-wide data exchange), offer AST™ functions (Alarming, Scheduling, and Trending), store custom graphic pages for visualization in LWEB-802/803, and can be seamlessly integrated in the LWEB-900 Building Management System. LIOB-585 I/O Controllers implement the BACnet Building Controller (B-BC) profile and are BTL certified.

IoT Integration

The IoT function (node.js) allows connecting the system to almost any cloud service, either for uploading historical data to analytics services, delivering alarm messages to alarm processing services or operating parts of the control system over a cloud service (e.g., scheduling based on Web calendars or booking systems). Processing Internet information such as weather data in forecast-based control is also possible. Finally, the JavaScript kernel also allows implementing serial protocols to non-standard equipment in primary plant control.

Local Operation and override

All L-IOB I/O Controllers are equipped with an LCD display (128x64) with backlight and jog dial for manual local operation and override. Device and data point information is displayed in text form and via graphical symbols.

Unitary and Terminal Controller

The LIOB-585 is designed to efficiently implement unitary and terminal applications in a compact form factor. The integrated differential pressure sensor, its local I/O, and the built-in MP-Bus port provide connectivity for all unitary and terminal equipment. In addition, the RS-485 port allows connection of L-STAT network thermostats for temperature and air quality measurement and user interaction.

Features

- Automation station with physical inputs and outputs
- IEC 61131-3 and IEC 61499 programmable with L-STUDIO
- 128x64 graphic display with backlight
- Local and remote access to information about device status and data points
- Manual operation using the jog dial or VNC client
- Alarming, Scheduling, and Trending (AST™)
- Node.js support* for easy IoT integration (e.g. Google calendar, Alexa & friends, multimedia equipment,...)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Stores customized graphical pages
- Visualization of customized graphical pages through LWEB-900 (Building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Support of the L-STAT Network Thermostat
- Built-in OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet MS/TP and BACnet/IP

*requires L-IOT1 software license

LIOB-585

- BACnet Client Function (Write Property, Read Property, COV Subscription)
- BACnet Client Configuration with configuration tool (scan and EDE import)
- B-BC (BACnet Building Controller) functionality, BTL certified
- Compliant with CEA-709, CEA-852, and ISO/IEC 14908 Standard (LonMark System)
- Supports IP-852 (Ethernet/ IP)
- Support of dynamically created or static NVs
- Support of user-defined NVs (UNVTs) and Configuration Properties (SCPTs, UCPTs)
- Integrated BACnet/ IP to BACnet MS/ TP Router including BBMD as well as Slave-Proxy functionality
- Gateway functions including Smart Auto-Connect™
- Integrated web server for device configuration and monitoring data points
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports WLAN through LWLAN-800 Interface
- Stores user-defined project documentation
- Integration of damper actuator via MP-Bus
- Differential pressure sensor

General Specifications		
Dimensions (mm)	107 x 100 x 75 (L x W x H), DIM057	
Installation	DIN rail mounting following DIN 43880, top hat rail EN 50022	
Operating conditions	0 °C to 50 °C, 10 – 90 % RH, non condensing, degree of protection: IP40, IP20 (terminals)	
Power supply	24 VDC / 24 VAC ±10 % via L-POW, or with an external power supply	
Program cycle time	Down to 10 ms	
Interface	2 x Ethernet (100Base-T): Web services (OPC XML-DA, OPC UA), LonMark IP-852, BACnet/IP*, Modbus TCP (Master or Slave), HTTP, FTP, SSH, HTTPS, Firewall, VNC, SNMP 2 x USB-A: WLAN (needs LWLAN-800), EnOcean (needs LENO-80x)	1 x RS-485 (ANSI TIA/EIA-485): BACnet MS/TP or L-STAT Network Thermostats 1 x MP-Bus
* Router between BACnet/IP and BACnet MS/TP		

Resource limits			
Total number of data points	10 000	LonMark Calendars	1 (25 calendar patterns)
OPC data points	1 000	LonMark Schedulers	10
BACnet objects	500 (analog, binary, multi-state)	LonMark Alarm Servers	1
BACnet client mappings	500	E-mail templates	50
BACnet calendar objects	25	Math objects	50
BACnet scheduler objects	10 (64 data points per object)	Alarm logs	10
BACnet notification classes	32	Modbus data points	300
Trend logs (BACnet or generic)	256 (4 000 000 entries, ≈ 60 MB)	Connections (Local / Global)	500 / 100
Total trended data points	256	Number of L-WEB clients	32 (simultaneously)
CEA-709 network variables (NVs)	500	L-STAT Network Thermostats	8
CEA-709 Alias NVs	500	EnOcean devices	10
CEA-709 External NVs (polling)	500	EnOcean data points	100
CEA-709 address table entries	256 (non-ECS mode: 15)		

L-STUDIO 3.0 licenses	
Type	LIOB-585
Programming, Tools	L-STUDIO software (IEC 61131-3 or IEC 61499), LINX Configurator
License	L-STUDIO: included L-LOGICAD: included

Specifications	
Type	LIOB-585
Power consumption	4.5 W
Universal Input (UI)	6
Digital Input (DI)	-
Analog Output (AO)	2
Digital Output (DO)	5 (5 x Triac 0.5 A)
Digital Output specification	Please refer to the " General Input and Output Specification of LOYTEC devices " at the end of the L-IOB section for more details.
Differential Pressure Sensor	0–500 Pa

L-IOB I/O Controller

LIOB-585

Order number	Product description
LIOB-585	L-IOB I/O Controller: 6 UI, 2 AO, 5 DO (5 x Triac 0.5 A), 1 Pressure Sensor
LPOW-2415A	LIOB-Connect power supply unit, 24 VDC, 15 W
LPOW-2415B	Power supply unit with power connector 24 VDC, 15 W
L-IOT1	Add-on software license for L-IOB Controller. Enables IoT functionality on LIOB-585/586/588/589 and LIOB-AIR
L-LOGICAD-LIOB	License to activate the L-LOGICAD runtime on L-IOB (only for LIOB-585, LIOB-588, LIOB-589 devices)
L-TEMP2	External temperature sensor (NTC10K) for use with L-IOB Universal Inputs
LENO-800	EnOcean Interface 868 MHz Europe
LENO-801	EnOcean Interface 902 MHz USA/Canada
LENO-802	EnOcean Interface 928 MHz Japan
LWLAN-800	Wireless LAN Interface IEEE 802.11bgn
LSTAT-800-G3-Lx	Network Thermostat, black front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, Buttons (Lx)
LSTAT-801-G3-Lx	Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)
LSTAT-802-G3-Lx	Network Thermostat, front black, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)
LSTAT-800-G3-L20x	Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, IR receiver, Buttons (Lx)
LSTAT-801-G3-L20x	Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, Buttons (Lx)
LSTAT-802-G3-L20x	Network Thermostat, white front, white enclosure, Modbus, NFC, temperature, rel. humidity, ext. switch/NTC, occupancy, IR receiver, CO2, Buttons (Lx)
LSTAT-80x-CUSTOM	Customized Network Thermostat, minimum quantity 100 pieces, enclosure G2: black, G3: white; custom print Lx, including 2 working samples, lead time 10 weeks

