

H21Z1016PDC-MP

21X 10mm-210mm F1.6
for 1/2 type Cameras, Motorized Zoom
C-Mount
For 2MP sensor cameras.


with DC Auto Iris and Preset

Model No.	H21Z1016PDC-MP		Effective	Front	φ 68mm
Focal Length	10mm - 210mm		Lens Aperture	Rear	φ 11.8mm
Max. Aperture Ratio	1:1.6		Back Focal Length		14.18mm
Max. Image Format	6.4mm x 4.8mm(φ 8mm)		Flange Back Length		17.526mm
Operation Range	Iris	F1.6 - F1000 (W/ND Filter)		Mount	C-Mount
	Focus	2m - Inf.		Filter Size	M72 P=0.75mm
	Zoom	10mm - 210mm		Tripod Screw	1/4 -20UNC
Control	Iris	DC Auto Iris		Dimensions	W84mm x H94.5mm x D175mm
	Focus	Motorized		Weight	1100g
	Zoom	Motorized			
Object Dimension at M.O.D.	10mm	152.0cm X 114.0cm			
	210mm	7.2cm X 5.4cm			
Angle of View	D	1/2 type	43.6° - 2.12°	1/3 type	33.3° - 1.61°
	H		35.4° - 1.72°		26.9° - 1.30°
	V		26.9° - 1.30°		20.2° - 0.98°
				1/4 type	25.2° - 1.22°
					20.2° - 0.98°
					15.2° - 0.73°
Supply Voltage	-		Iris	Focus	Zoom
Current	-		DC6-12V		DC6-12V
Response Time	-		40mA or less		40mA or less
Preset Potentiometer	-		8-16 sec.		7.5-15 sec.
Light Weighting method	-		10kΩ VR		10kΩ VR
Input Signal	-				
Iris Accuracy	-				
Sensitivity Adjustment	-				
Input Impedance	-				
Coil	Drive	190Ω			
	Control	1900Ω			
Operating Temperature	-10°C - +50°C				

1/2 type


C

Dimensions

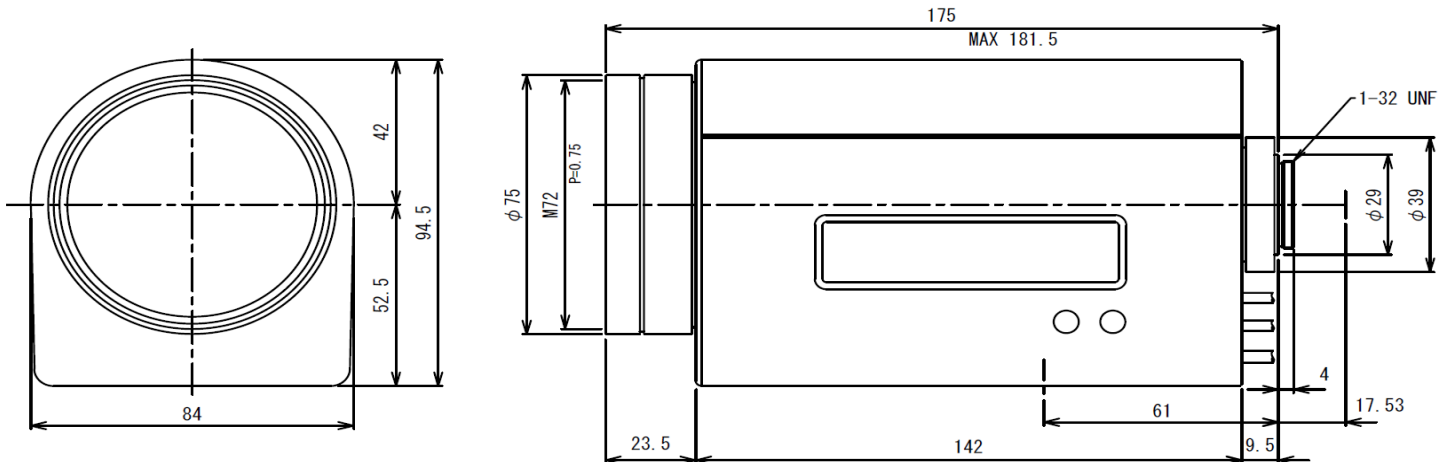

Wiring Diagram

Iris, Focus & Zoom

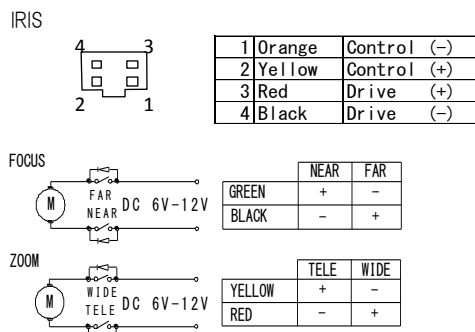

Potentiometer

